

Network Video Recorder

Version: V3.4.92 build161228

Release Note

(2017-3-13)

Firmware Basic Information	Firmware Version:	V3.4.92 build170228
	SDK Version:	V5.2.6.30
	ONVIF Protocol:	ONVIF V2.5.0
	IVMS-4200:	V2.5.6.7 build20170210
	Web Component:	V3.0.6.13 build170124 (I/K series) V3.0.6.8 build170124 (E series)

Reason of Upgrade

Add new functions and fix bugs for better performances on E/K/I series NVR.

Firmware Upgrade

New Features

1. [DDNS]

Delete HiDDNS and IPServer access. Available DDNS access include DynDns, PeanutHall, NO-IP.

Enable DDNS

DDNS Type: 

Server Address:

Domain:

User Name:

Password:

Confirm:

DDNS Type dropdown menu:


- DynDNS
- DynDNS**
- PeanutHall
- NO-IP

 Save

2. [Hik-Connect]

- (1) User needs to input Hik-Connect verification code before enabling Hik-Connect function, default verification code is removed from this version;
- (2) User needs to read Hik-Connect service terms and privacy statement before enabling service, the url is:

<https://www.hik-connect.com/views/terms/termsofservice.html>

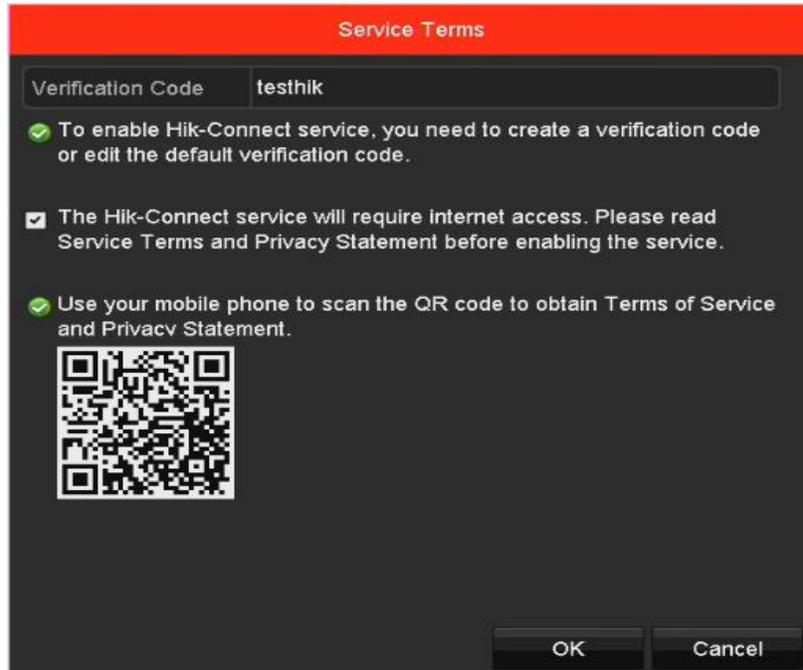

- (3) The default status of Hik-Connect is off in this version. If user has enabled Hik-Connect service, the service status is on after upgrading to this version. When user disables the service and enables again, a new verification code is required if older verification code is 'ABCDEF' or default.

3. [Virtual Host]

DS-7604NI-K1/4P supports virtual host function.

4. [IP Camera Access]

Support access to IP camera with IP camera's Hik-Connect domain name, the IP camera and NVR should be added to same account.

Optimization

1. [Video Player]

In older version, E series Multi language firmware doesn't contain video player when users exports videos. In this version, European regions' firmware is divided to specified area, user can choose multi-language version with video player.

2. [HDMI]

Optimize DS-9600NI-Ix NVR's HDMI2 output compatibility with some Samsung displays.

3. [Thermal camera]

Fix the issue NVR can't save thermal camera's VCA pictures if there's no picture transmitted in visible light channel.

4. [Storage Server]

Optimize NVR's performance when massive pictures are sent from platform with SDK process.

Supported Product List			
I series NVR	DS-76xxNI-I2	DS-76xxNI-I2/xP	DS-77xxNI-I4
	DS-77xxNI-I4/xP	DS-96xxNI-I8	DS-96xxNI-I16
K series NVR	DS-76xxNI-K1	DS-76xxNI-K1/P	DS-76xxNI-K2
	DS-76xxNI-K2/xP	DS-77xxNI-K4	DS-77xxNI-K4/xP
E series NVR	DS-76xxNI-E1	DS-76xxNI-E1/xP	DS-76xxNI-E1/xN
	DS-76xxNI-E2	DS-76xxNI-E2/xP	DS-76xxNI-E2/xN
	DS-77xxNI-E4	DS-77xxNI-E4/xP	

Customer Impact and Recommended Action

This new firmware upgrade is to improve product performance, and will take effect automatically after upgrading from previous versions. We'd like to inform you the above changes. Also, we are sorry for any possible inconvenience of use-habit changes caused by this action.

For questions or concerns, please contact our local technical support team.

Note:

- Hikvision has all rights to alter, modify and cancel this notice.
- Hikvision doesn't give any guarantee for old models' stock.
- Hikvision is not liable for any typing or printing errors.
- For special model's change details, please contact our local technical support team.