

6 Series Indoor Stations Version: V2.1.66_build220926 Release Note (2022-09-29)

	Firmware Version	V2.1.66_build220926
Firmware		DS-KH6320-LE1(B)
1 IIIIIIIII		DS-KH6320-LE1(B)/White
Basic		DS-KH6320-TE1(B)
Information	Device Type	DS-KH6320-WTE1(B)
iniormation		
		DS-KH6350-WTE1
		DS-KH6350-TE1

<u>Fix</u>

Optimized the screen touching sensitivity of the following product models:

- ➤ DS-KH6350-TE1
- ➤ DS-KH6350-WTE1

Note: This version is only worked with DS-KH6350-W/TE1.



6 Series Indoor Stations Version: V2.1.58_build220815 Release Note (2022-08-23)

	Firmware Version	V2.1.58_build220815
Firmware		DS-KH6350-WTE1
Basic		DS-KH6320-LE1(B)
Dasic		DS-KH6320-LE1(B)/White
Information	Device Type	DS-KH6320-TE1(B)
		DS-KH6320-WTE1(B)
		DS-KH6360-TE1
		DS-KH6360-WTE1

Fix some bugs




6 Series Indoor Stations Version: V2.1.50_build220720 Release Note (2022-07-20)

	Firmware Version	V2.1.50_build220720
Firmware		DS-KH6350-WTE1
Basic		DS-KH6320-LE1(B)
Dasic		DS-KH6320-LE1(B)/White
Information	Device Type	DS-KH6320-TE1(B)
		DS-KH6320-WTE1(B)
		DS-KH6360-TE1
		DS-KH6360-WTE1


New

1. Support configure the Static IP of Wi-Fi (enable device configure DHCP, IP address, Subnet mask, gateway, DNS1, DNS2).

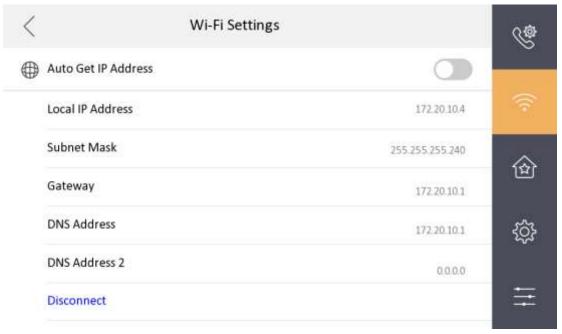


2. Indoor station supports configuring time and time zone information for the door station.



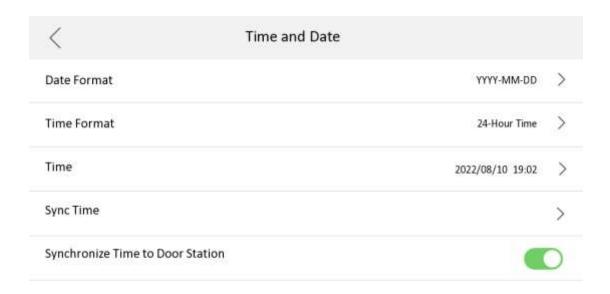


- 3. Support C-S registration mode of indoor station, and master station.
- 4. Two new Standard language(Portuguese, Slovak) have been added.

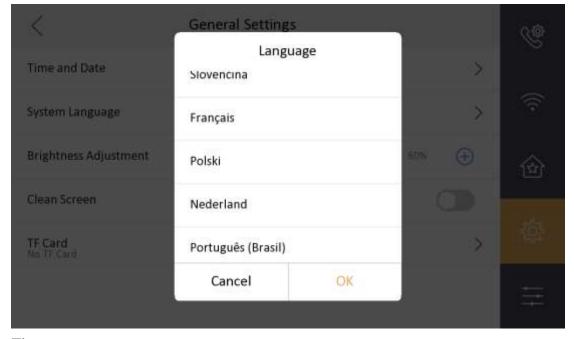


Fix

1. Fix the indoor station maintenance interface. When click restore or restore all, a prompt information will pop.



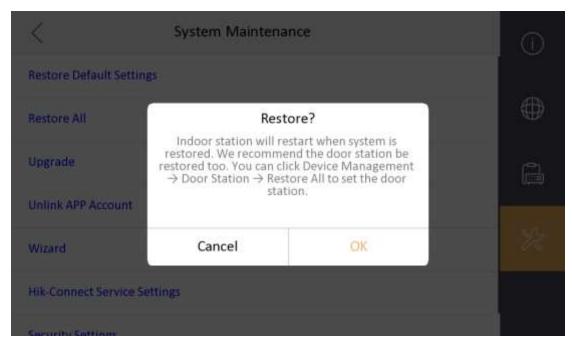


2. The indoor station wizard-related devices added the effect of selecting the door station.

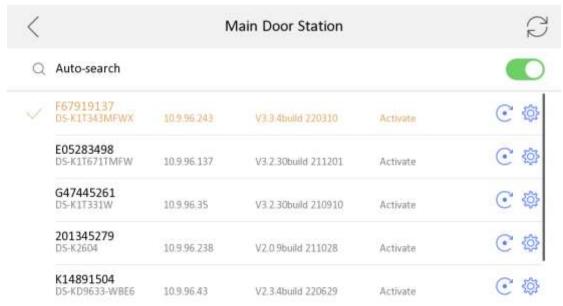


3. Add a prompt information when assign network IP address automatically.



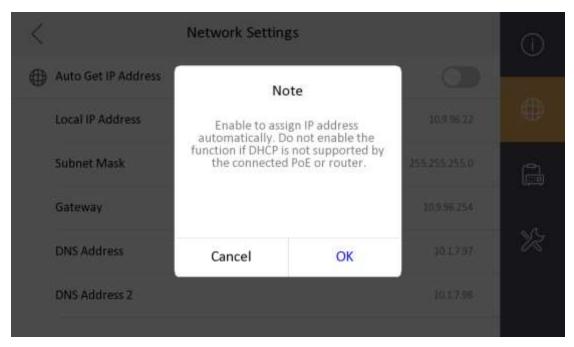

4. In configure wizard to related door station, when the door station password is different from the indoor station, prompt information will pop.

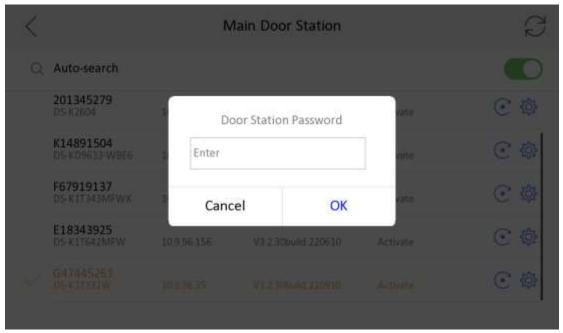



6 Series Indoor Stations Version: V2.1.44_build220516 Release Note (2022-05-22)


	Firmware Version	V2.1.44_build220516
Firmware		DS-KH6350-WTE1
Basic		DS-KH6320-LE1(B)
Dasic		DS-KH6320-LE1(B)/White
Information	Device Type	DS-KH6320-TE1(B)
		DS-KH6320-WTE1(B)
		DS-KH6360-TE1
		DS-KH6360-WTE1

Fix

- 1. Fixed a sync issue between device and Hik-Connect service.
- 2. Fixed a sync issue for Main-Sub indoor station mode.

New

1. Support the network parameters synchronized from villa door station.

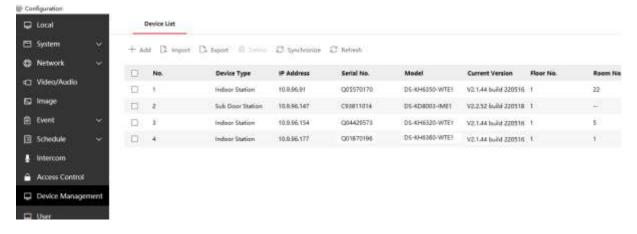



6 Series Indoor Stations Version: V2.1.38_build220228 Release Note (2022-03-01)

1. Firmware Basic Information

	Firmware Version	V2.1.38_build220228
Firmware		DS-KH6350-WTE1
Basic		DS-KH6320-LE1(B)
Dasic		DS-KH6320-LE1(B)/White
Information	Device Type	DS-KH6320-TE1(B)
		DS-KH6320-WTE1(B)
		DS-KH6360-TE1
		DS-KH6360-WTE1

Notes:

Please update firmware to the latest version to ensure the perfect user experience

1.1 Recommended Firmware

It is recommended to use the following devices and version together, because they can cooperate and work normally after the docking test.

Test resource	Device type	Version
Release device	DS-KH6350-WTE1	V2.1.38_build220228
	DS-KD9203-E6	V2.2.37_build210929
	KD8023-E6	V2.2.2_ build 201019
Door Station	DS-KD8003-IME1	V2.2.52_ build 211126
	DS-KB8113-IME1	V2.2.51_ build 211110
	DS-KV8413-WME1(B)	V2.2.53_ build 211104
	DS-KH9510-WTE1	V2.1.28_build210803
Indoor Station	DS-KH6320-LE1	V1.4.58_build210823
	KH6320-WTE1	V2.1.32_build210926
Main Station	KM9503	V1.0.32_build210926

Notes:




Test records only contain the cases for normally devices and do not represent all the scenarios and all the functions.

2. New Features

1. New version of the device is based on the last version and develop new appearances.




- 2. Support password recovery by security question. You can set as the following steps.
 - (1) "Wizard">Password reset method>change to security question.

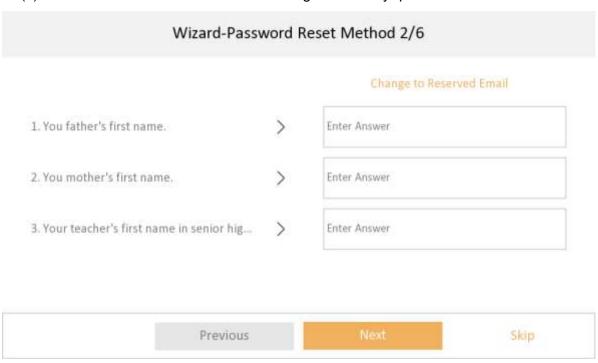

(2) Configuration>system maintenance>security settings>security question



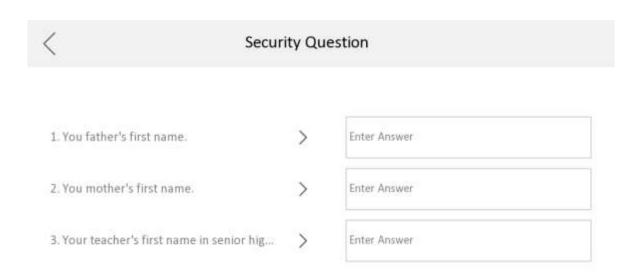

3. The indoor Station adds the configuration item of code stream transmission mode, supporting choosing unicast and multicast.

According to the web setting for the switchers or the routers.



4. Add message and snapshot configuration options, which are closed by default. After opening, you can configure the deletion time of message and screenshot.



<	Shortcut Settings	
Alarm		
Call Management Center		
Leave Message		
Leave Message Time		30 days >
Snapshot		
Snapshot Time		30 days >

4. Modified

- 1. The function of password recovery by email is switched to the configuration wizard
- 2. The compatibility of standard SIP Server is improved: (1) ASTERISK (2) FreePBX
 - (3) 3CX (4) ELASTIX (5) PBXware (6) miniSipServer (7) Brekeke (8)
 - OpenSIPs (9) Kamailio

Note:

- Hikvision has all rights to alter, modify and cancel this notice.
- Hikvision doesn't give any guarantee for old models' stock.
- Hikvision is not liable for any typing or printing errors.
- For special model's change details, please contact our local technical support team.

Hikvision Digital Technology CO., Ltd.

No. 555 Qianmo Road, Binjiang District, Hangzhou 310052,

China

Tel: +86-571-8807-5998 FAX: +86-571-8993-5635 Email: support@hikvision.com