


How to change the tilt angle range of 41xx thermal camera

Purpose :

As we all know, the tilt angle range of 41 series thermal speed dome is default to be $-5\sim 90^{\circ}$. Actually, the range could be expanded to $-20\sim 90^{\circ}$ via adjusting hidden interface. Due to the increasing requirement from customer, it will be optimized (add the hidden interface into webedge) in next PTZ version V5.5.10

Here is the steps of adjusting the range of tilt angle :


1. Login the device and call the preset 95

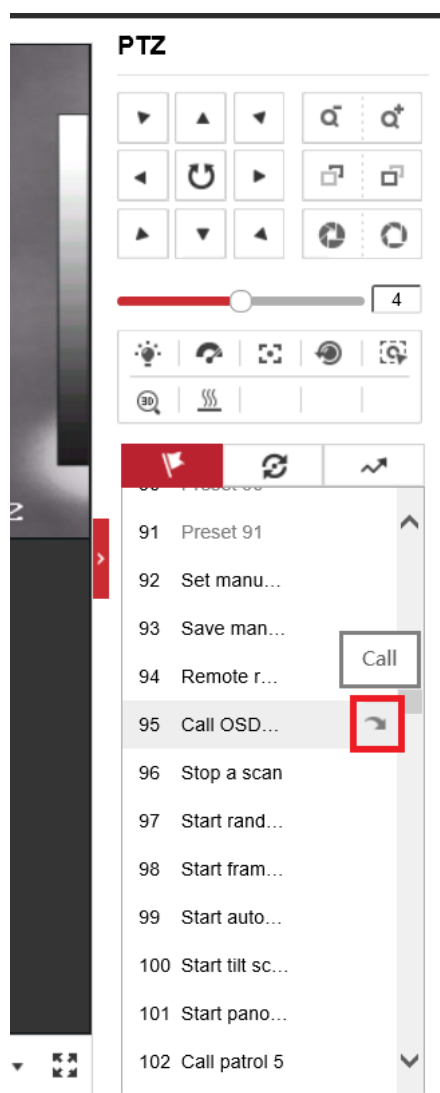


The hidden interface will appear as the picture below:




2. You can switch options by adjusting UP and DOWN of PTZ, and click Iris+ to confirm.

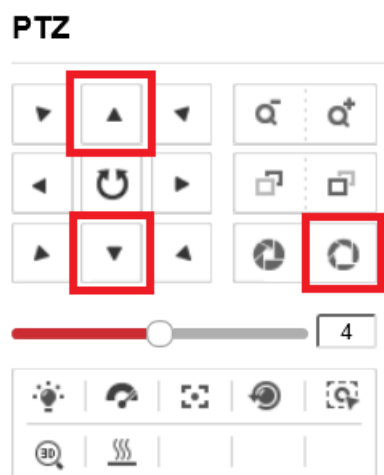


3. Choose System Settings and confirm, a new interface will appear :

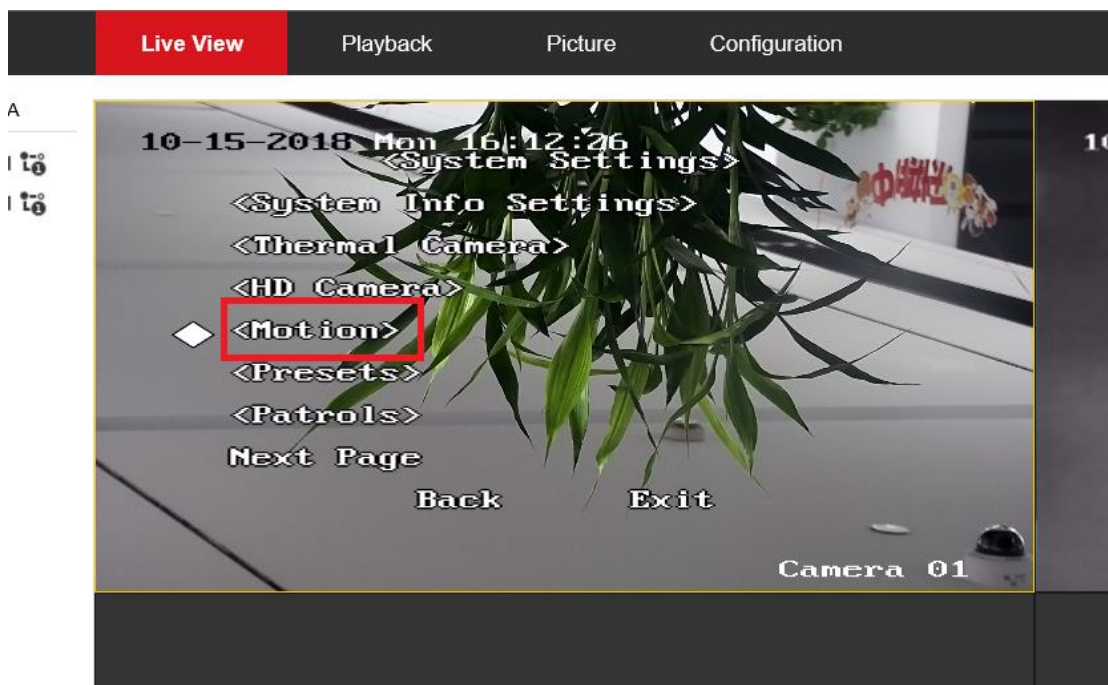


4. Then enter Motion option :

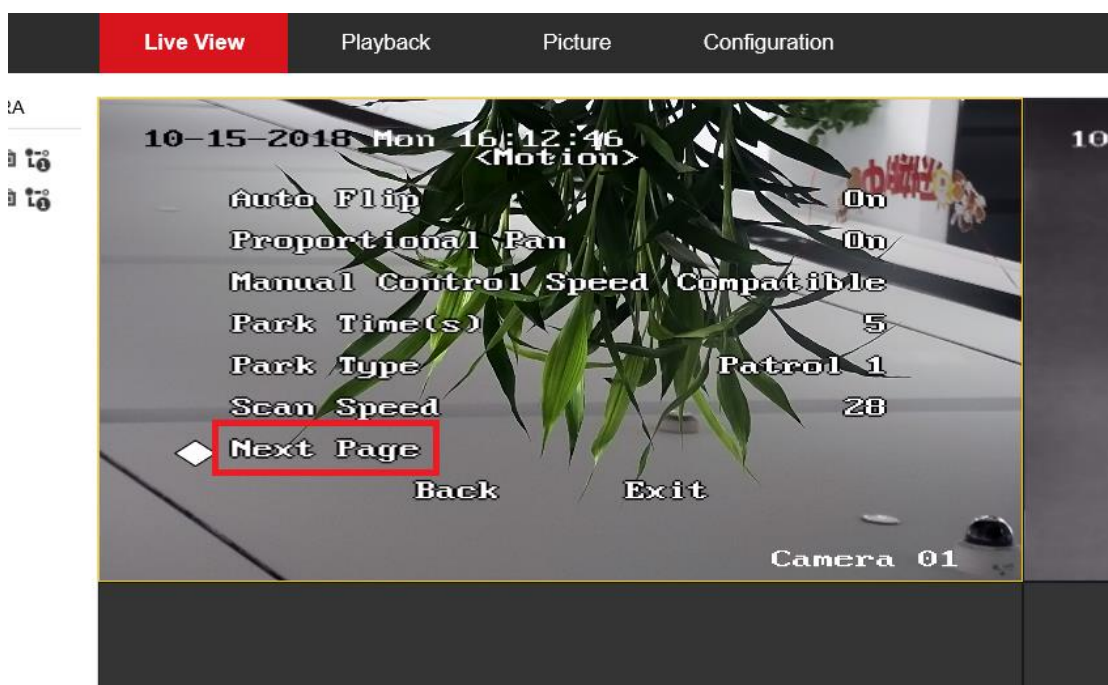

5. Then enter Next Page, we can see that the Tilt angle is default to be $-5^{\circ}\sim 90^{\circ}$

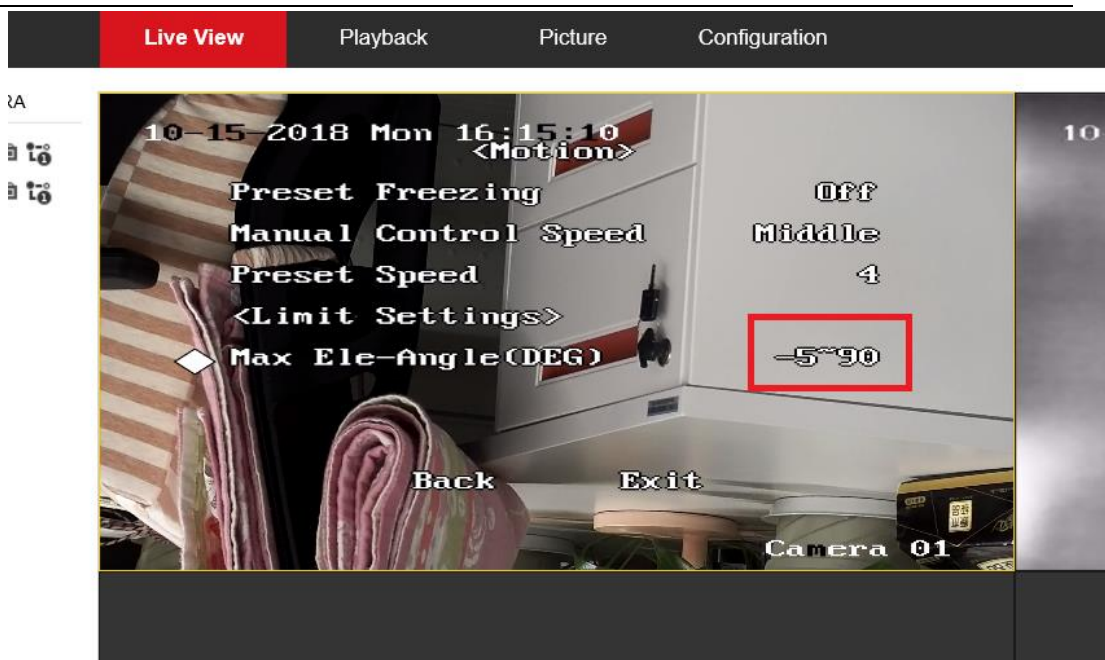

6. Choose the Max Ele-Angle(DEG) and click Iris+ to confirm, the diamond on the left will get hollow, then you can click UP and DOWN to adjust it from -5~90° to -90~90° (actually the effect is -20~90°)

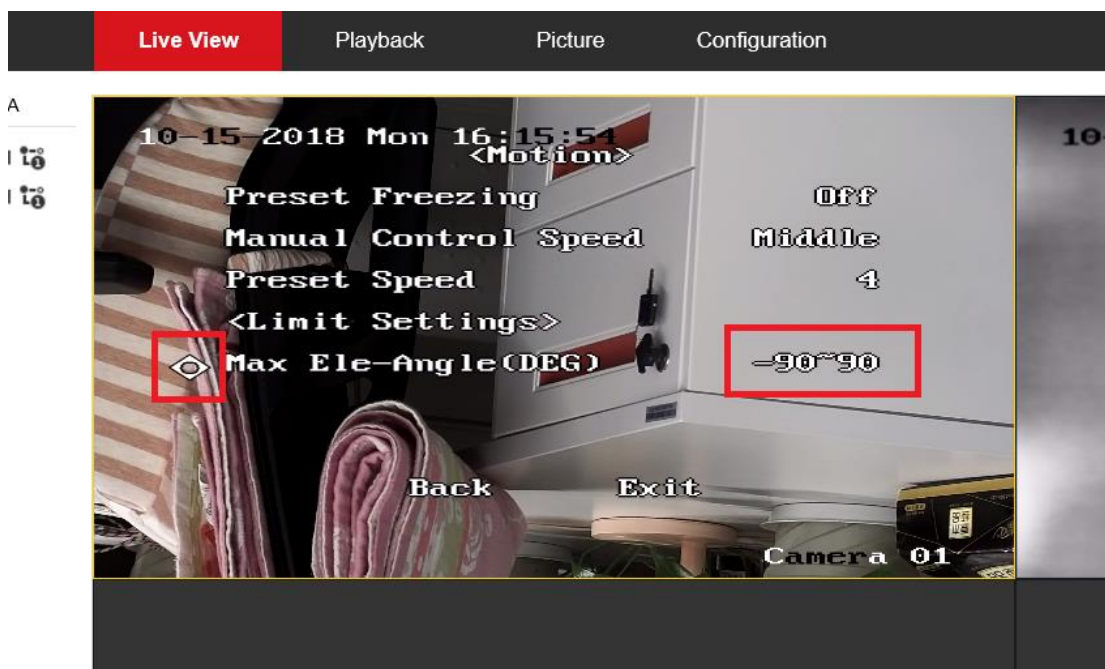


Click confirm again and then click back to quit :

The final effect is just like the picture below :

Live View Playback Picture Configuration



Live View Playback Picture Configuration

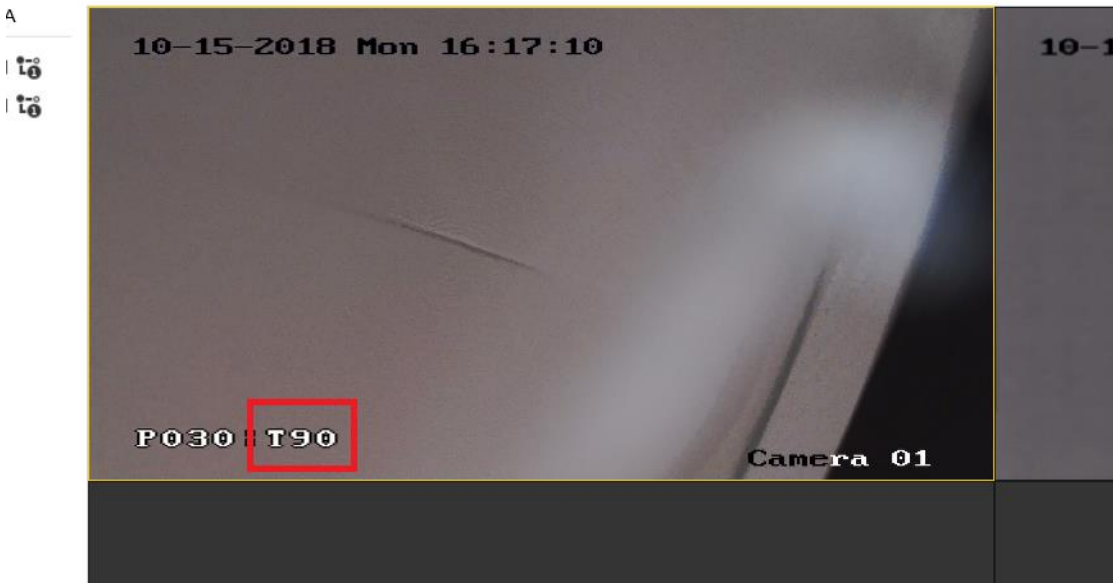

First Choice for Security Professionals

HIKVISION Technical Support