

## DS-1322HZ-H

Outdoor Housing with heater



### Features:

- All-weather integrated design, convenient installation and maintenance.
- Fully sealed design, high temperature resistance, Anti strong wind; storm and dust.
- Configure different types of camera lens according to the respective requirements.


### Notice:

- Read the instructions carefully and observe all warnings before installing this equipment.
- Turn off the power before wiping this equipment, do not use liquid or spray cleaning agent.
- Do not install on unstable bracket.
- Protect the power line, especially the flexible line of the plug and camera.

### Order Model:

DS-1322HZ-H

### Dimension:

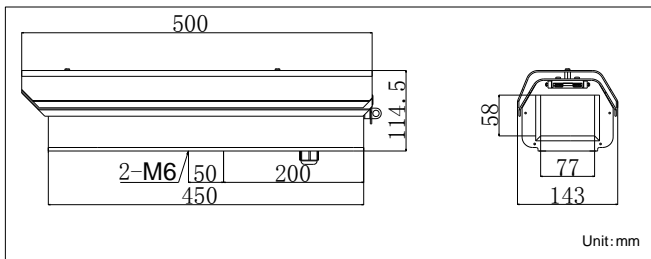

### Parameter:

Parameters	Model	DS-1322HZ-H
		Outdoor housing
Produce features		Contain heater, fan, sun shading cover
Working temperature		-40°C~+60 °C, Humidity 95% or less (non-condensing)
Window area(mm)		77×58
Automatic temperature control range		Heater on: 5°±5°; Heater off: 15°±5°(Fan operating) Fan on: 45°±5°; Fan off: 35°±5°
Power		AC 24V
Power consumption		55W
Protection level		IP66
Material		Main: aluminum alloy Window: glass
Dimension(mm)		143×114.5×500
Matching power supply		AC24V 3A power pack