


DS-1213ZJ(-S)

Wall Mounting Bracket Indoor/Outdoor

Features:

- Die casting aluminum with surface spray treatment
- Design with cable entry hole
- Sponge pat is fixed on the surface of substrate to ensure the stabilization of camera
- The soleplate is rotatable for monitoring scene adjustment

Dimension:

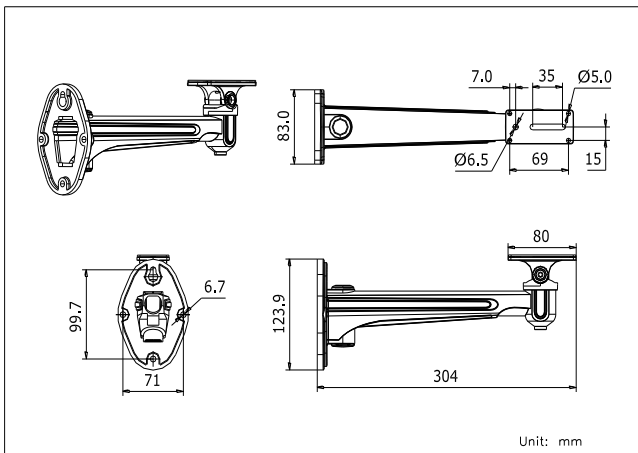

Order model:

DS-1213ZJ

DS-1213ZJ-S

Parameters:


Model	DS-1213ZJ	DS-1213ZJ-S
Parameter	Wall Mounting Bracket Indoor/Outdoor	
Color	Hik white	Silver
Feature	Suitable for bullet camera and housing of indoor/outdoor wall mounting	
Material	Aluminum alloy	
Angle	Horizontal: 360°; Vertical: -45°~45°	
Dimension	83 × 123.9 × 304mm	
Weight	765g	
Configurable Bracket	DS-1215ZJ (vertical pole mount)	

Notice:


- Pay attention to the color matching
- The bracket is installed on the flat surface of a wall
- The diameter of hole site is within 6.5mm
- The distance between two screw hole is 20~54mm
- The wall must be capable of supporting more than 3 times the total load of the camera and the mount.
- The Max. capacity load of bracket arm is 8.5kg
- The maximum load capacity of the mount is 2.5KG

Installation step:

① Choose the appropriate wall to mount the bracket

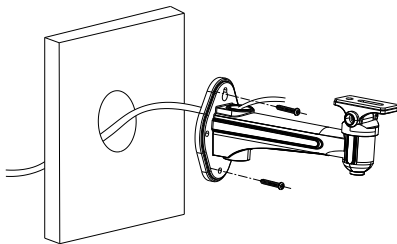


② Complete the fixation and wiring

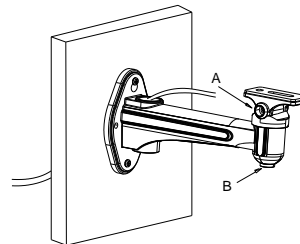


A: Screw of vertical adjust; B: Screw of Horizontal adjust

③ Unscrew the vertical adjusting screw and get the soleplate out of the camera.

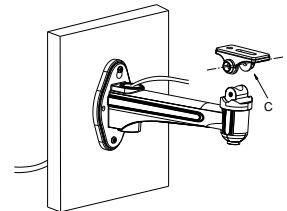


C: Installation base of camera


④ Fix the camera onto the base and screw up



⑤ Fix the IPC & base onto the bracket and screw up; adjust the site and angle of IPC

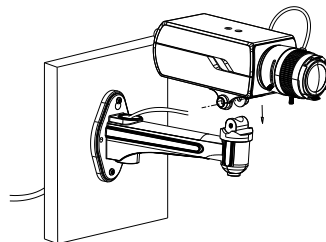

⑥ The bracket can also be used with housing

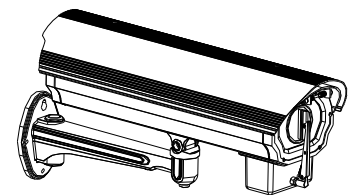

Note: The actual bracket may vary from the picture above.