


DS-1656ZJ

Pendent Mount Bracket

Features:


- Aluminum alloy material with surface spray treatment
- General design for outdoor
- Design of cable entrance hole
- Better water proof with rubber pad design
- With safety rope, the assembling is safer and more convenient

Dimension:

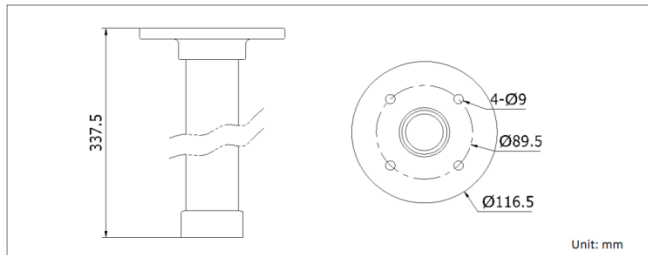


Installation steps:

- ① Choose the appropriate wall to mount the ceiling, and rubber blanket should be added when assembling outdoors



Note A: Waterproof rubber blanket

- ③ Fasten the safety rope, thread the line and assemble the speed dome



C: Safety rope hook D: Safety rope

Order model:

DS-1656ZJ

Parameters:


Model	DS-1656ZJ
Parameter	Pendent Mount (300mm)
Color	Hik white
Feature	Suit for 30cm pendent mount
Material	Aluminum alloy
Dimension	Φ 116.5 × 337.5mm
Weight	720g



Notice:


- The bracket should be installed on the flat surface of a wall
- The wall must be capable of supporting more than 3 times the total load of the camera and the mount
- The maximum load capacity of the mount is 30KG

- ② Twist and fix the screwed pipe after threading



Note B: Screw hole

- ④ Fasten the snap joint fixing screw



E :Snap joint fixing screw.

Note: The actual bracket may vary from the picture above.