


How to Make Recording Schedule in HikCentral

Note: As we all know, we can add Hybrid SAN into HikCentral and configure recording schedule for each camera. This manual will show you how to do it and points for attention.

Steps

1. You need to insert the hard driver before configuring device. And the disk should be installed in right position as follow pictures.

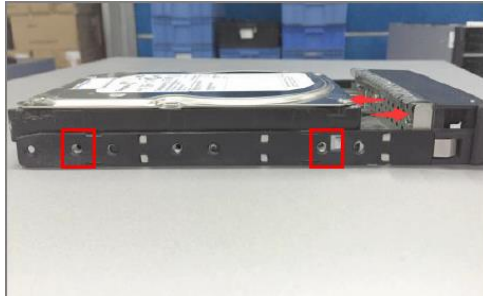

Wrong Installation

Correct Installation

2. The status of disk is **unauthorized** when you insert new disk into device. so you need to **check** or **detect** it. The status of disk will be **Normal** after checking or detecting.

HIKVISION DS-A management Normal

Maintenance

Storage

HDD Management

Array

Storage Pool

LUN

Configuration

SAN Management

NAS

Hybrid SAN

System

Log System

Use Help

Logout

Storage -> HDD Management

HDD Status Rescan Sleep Status


HDD Information (Total: 5)

Position	Supplier	Model	Capacity (MB)	State	Group	HDD Status
0/0-2	WD	WD60PURX-64LZMY0.WD-WX31...	5,723,166	Normal	Array (RAID5)	View
0/0-3	WD	WD40PURX-64GVNY0.WD-WCC4...	3,815,447	Normal	Array (RAID5)	View
0/0-4	WD	WD40PURX-64GVNY0.WD-WCC4...	3,815,447	Normal	Array (RAID5)	View
0/0-5	Seagate	ST4000VX000-1F41.Z303ZY...	3,815,447	Normal	Array (RAID5)	View
0/0-6	WD	WD40PURX-64GVNY0.WD-WCC4...	3,815,447	Normal	Global Hot Spare Disk	View



Position Initialize **Detect**

Position	Supplier	Model	Capacity (MB)	State	Group	HDD Status
0/0-2	WD	WD60PURX-64LZMY0.WD-WX31...	5,723,166	Normal	Array (RAID5)	View
0/0-3	WD	WD40PURX-64GVNY0.WD-WCC4...	3,815,447	Normal	Array (RAID5)	View
0/0-4	WD	WD40PURX-64GVNY0.WD-WCC4...	3,815,447	Normal	Array (RAID5)	View
0/0-5	Seagate	ST4000VX000-1F41.Z303ZY...	3,815,447	Normal	Array (RAID5)	View



3. Add Hybrid SAN device into HikCentral in device management interface. The device type belongs to **Recording server**. You need to input IP address, user name and password. Then click Add.

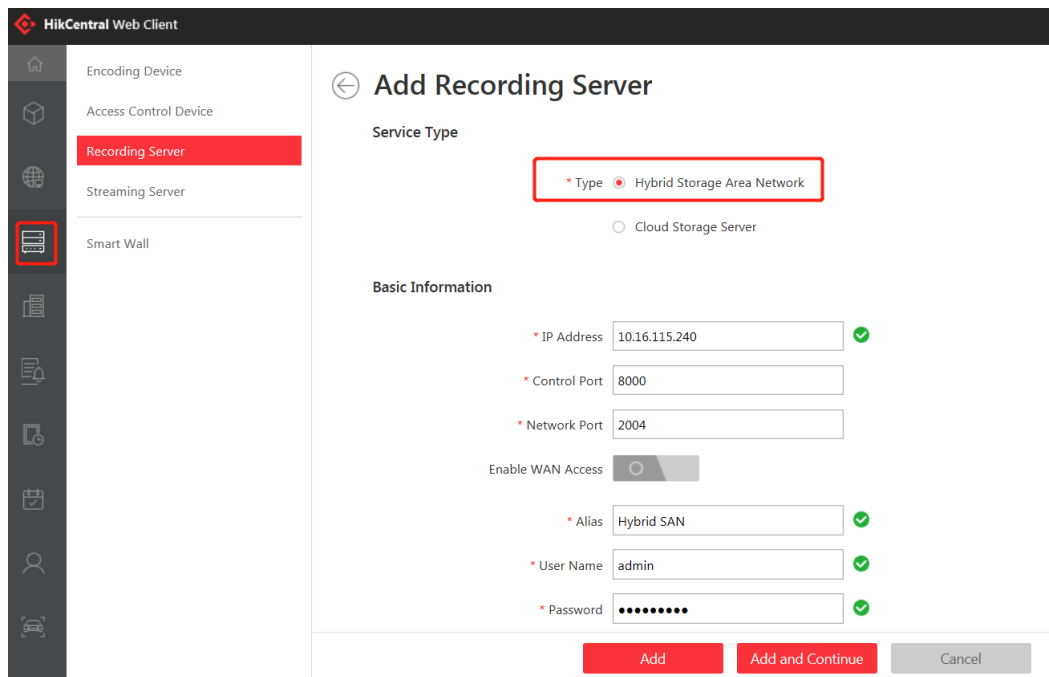

4. Click **One-touch Config**, there is a pop-up window to select the type of RAID, normally is RAID 5, then click OK, which will start to automatically configure Hybrid SAN service,

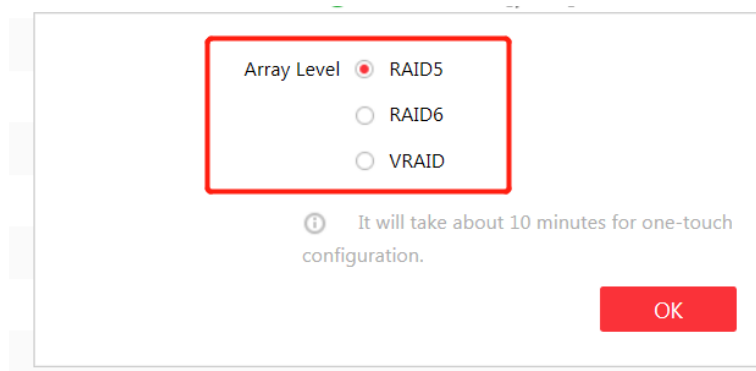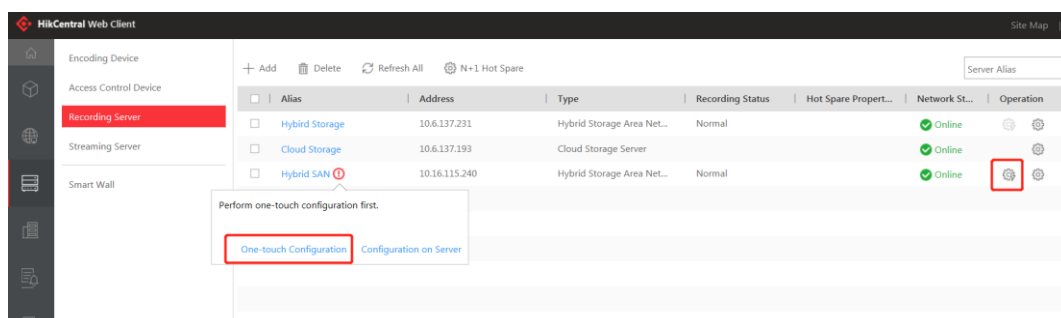

5. After one-touch configuration, you can start to make recording schedule in **Logical view** interface. Choose the group in left bar which you want to make recording schedule. And then click the camera. choose **storage server** and **related volume**. Finally, Configure record schedule template for camera and click **save** button .

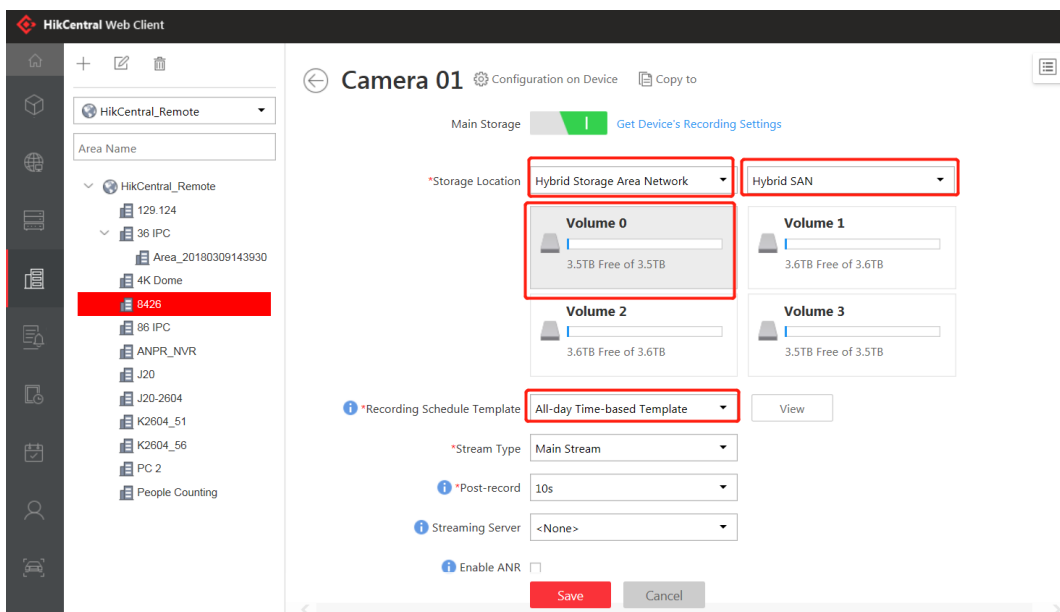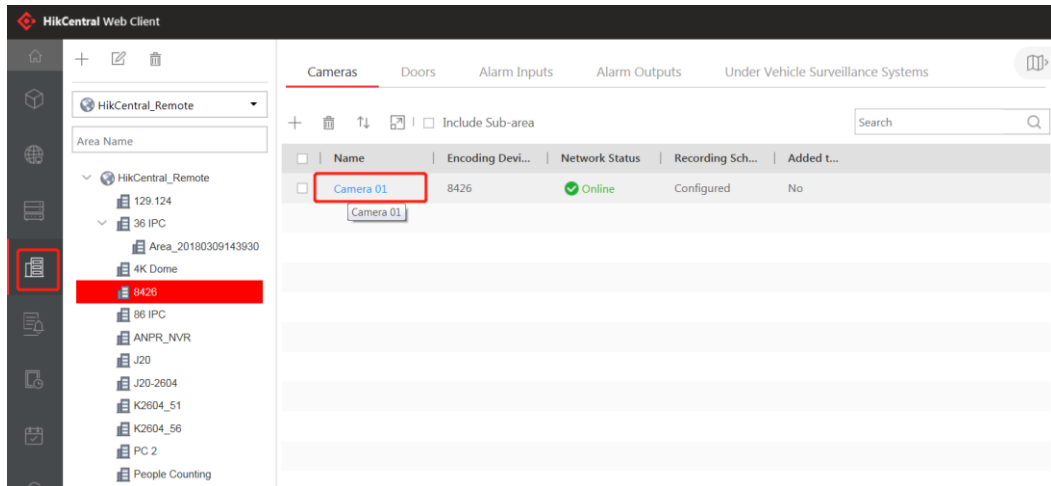

First Choice for Security Professionals

HIKVISION Technical Support