

Title:	How to Configure Abnormal Temp Event Linkage Send Email in 4200	Version:	v1.0	Date:	06/29/2020
Product:	Access Control Devices			Page:	1 of 6

Preparation

1. Face Recognition Terminal DS-K1T671TM-3XF / DS-K1TA70MI-T /DS-K5604A-3XF v2.2.6 build0527
2. iVMS4200 v3.3.0.7 or later version

How to Configure Abnormal Temp Event Linkage Send Email in 4200

When Temperature Face Recognition Terminal add to 4200, if you need linkage the event (Abnormal Temp or No Mask) to send Email, you can follow the steps.

1. Configure 4200 Email

- 1) Select **System Configuration—Email**
- 2) Configure Email SMTP Server, Port, Sender address, User name, Password and Receiver Email
- 3) Click **Send Test Email** to check sending email function is ok or not


The screenshot displays the iVMS-4200 web interface. The top navigation bar includes 'Event Center' and 'Maintenance and Management'. The left sidebar shows 'System Configuration' with 'Email' selected. The main content area is titled 'Email' and contains the following configuration fields:

- SMTP Server:** hikml16.hikvision.com.cn
- Encryption Type:** Not-Encrypted (selected), SSL, STARTTLS
- Port:** 25
- Sender Address:** ruanzaisheng@hikvision.com.cn
- Security Authentication:**
- User Name:** ruanzaisheng@hikvision.com.cn
- Password:** [masked]
- Receiver 1:** ruanzaisheng@hikvision.com.cn
- Receiver 2:** [empty]
- Receiver 3:** [empty]

At the bottom of the configuration area, there is a 'Send Test Email' link and two buttons: 'Save' and 'Default Value'.

Title:	How to Configure Abnormal Temp Event Linkage Send Email in 4200	Version:	v1.0	Date:	06/29/2020
Product:	Access Control Devices			Page:	2 of 6



2. Open Event Configuration.

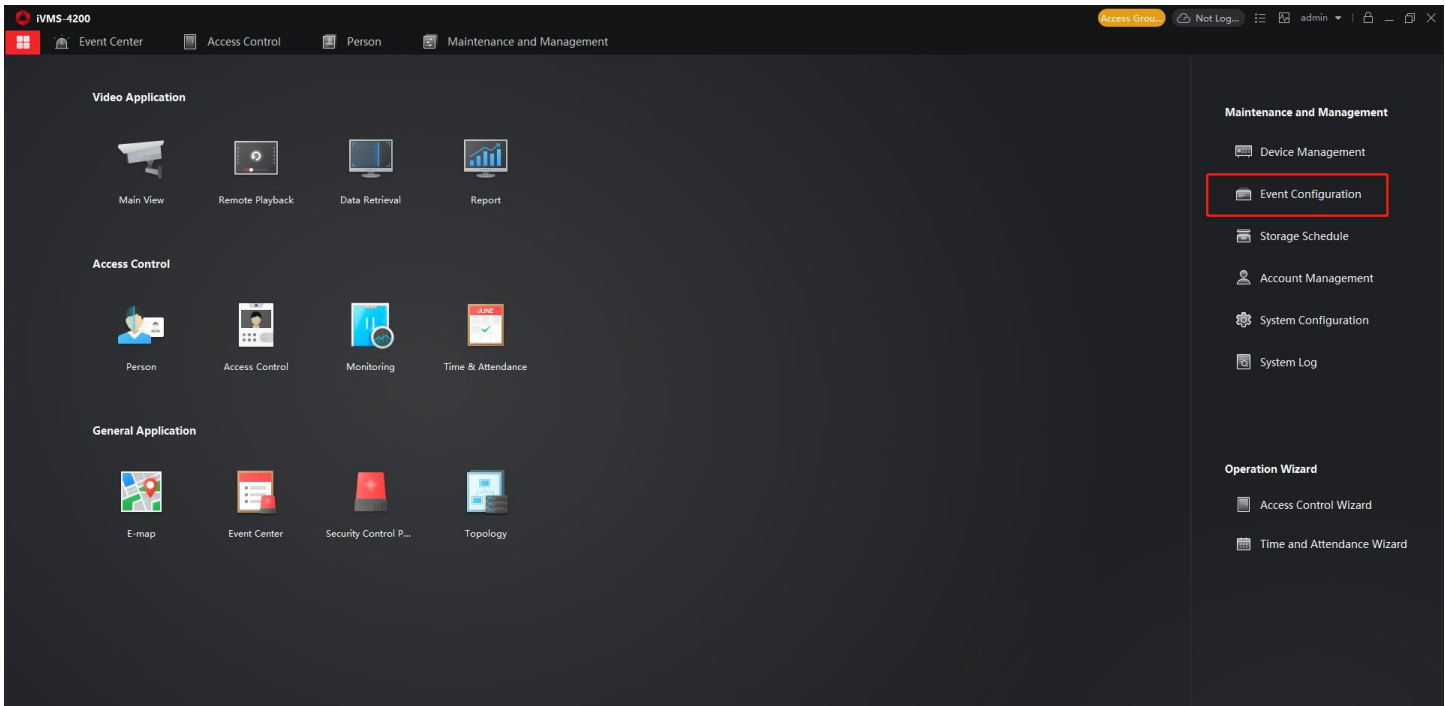

3. Configure Event Configuration

- 1) Select **Access Event**.
- 2) Select the device name you need configured.
- 3) Select the **Abnormal Temperature** event
- 4) Click the **Edit Linkage** function
- 5) Enable the **Send Email**
- 6) Click save.

Title:	How to Configure Abnormal Temp Event Linkage Send Email in 4200	Version:	v1.0	Date:	06/29/2020
Product:	Access Control Devices			Page:	3 of 6

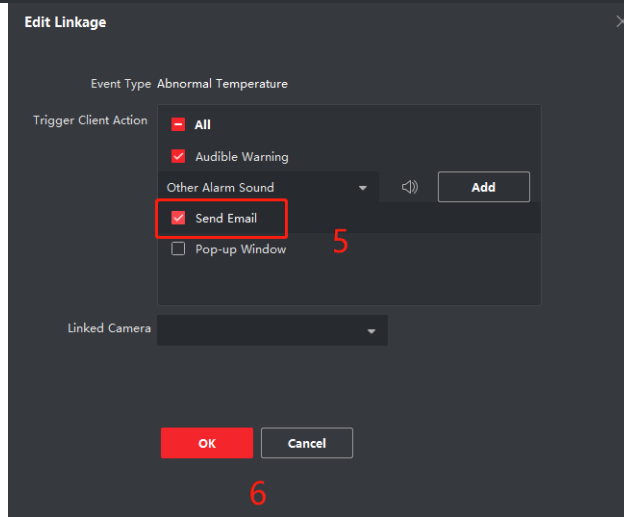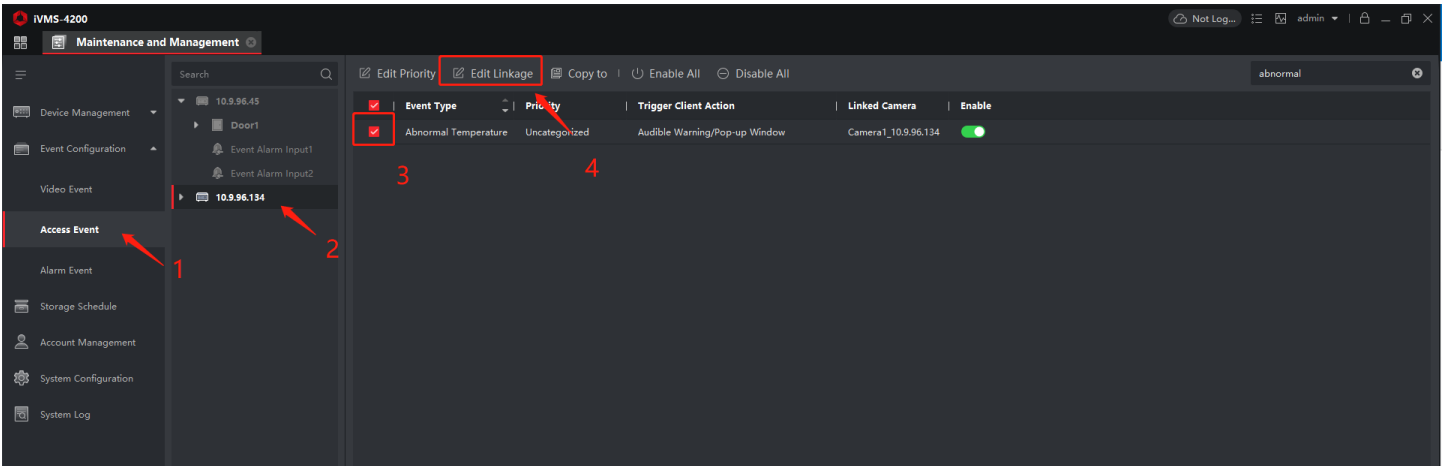

4. Result shows

- 1) Simulated high temperature, then you can get the Email of Alarm Event



Title:	How to Configure Abnormal Temp Event Linkage Send Email in 4200	Version:	v1.0	Date:	06/29/2020
Product:	Access Control Devices			Page:	4 of 6

Part E-mail account instructions:

	User Name/ Password	Sender	SMTP Server address	SMTP Port	Encryption Type
Gmail	XXXX Password	XXXX@gmail.com	smtp.gmail.com	587	TLS/STARTTLS(TLS)
Outlook	XXXX@outlook.com Password	XXXX@outlook.com	smtp.office365.com	587	STARTTLS(TLS)
hotmail	XXXX@hotmail.com Password	XXXX@outlook.com	smtp.office365.com	587	STARTTLS(TLS)
Yahoo	XXXX Password	XXXX@yahoo.com	smtp.mail.yahoo.com	587	STARTTLS(TLSV1.2)
126	XXXX Password	XXXX@126.com	smtp.126.com	465	SSL/TLS
Sina	XXXX Password	XXXX@sina.com	smtp.sina.com	25/465/ 587	SSL/TLS/STARTTLS(SSL/TLS)

First Choice for Security Professionals
HIKVISION Technical Support